RANGE COMPOSITION

A range of wall-mounted hoods used for snack applications and on the N700 and N 900 Series cooking units. Their particular profile and the limited installation height makes them suitable for use in places with low ceilings.

The range consists of hoods with 8 different lengths (1200, 1600, 2000, 2400, 2800, 3200, 3600 and 4000 mm) and a depth of 1400 mm.



MASTER - M line - 1400 mm

430 AISI CENTRAL TYPE HOODS


ZANUSSI


FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in 430 AISI stainless steel.
- ◆ Labyrinth filters in 430 AISI stainless steel easily removable for cleaning. Labyrinth filters guarantee constant filtration to avoid clogging and protect against fire.
- ◆ Central drain pipe with drain hole to transfer grease into a 304 AISI container.
- ◆ External panels with upturned edges to avoid injuries.
- ◆ Blind panels in 304 AISI stainless steel for a correct exhaustion.
- ◆ The outlet holes are sized in order to minimize drops in pressure.

- Pressure gauging for perfect calibration.
- ◆ Condensate collection tray in 304 AISI stainless steel.
- ◆ Eyebolts and screw anchors for ceiling installation.
- ◆ Prearranged for installation of lighting.

TECHNICAL DATA CHARACTERISTICS	MODELS								
0.000	MC1412BT 642097	MC1416BT 642098	MC1420BT 642099	MC1424BT 642100	MC1428BT 642101	MC1432BT 642102	MC1436BT 642103	MC1440BT 642104	
External dimensions - mm									
width	1200	1600	2000	2400	2800	3200	3600	4000	
depth	1400	1400	1400	1400	1400	1400	1400	1400	
height	500	500	500	500	500	500	500	500	
Air Capacity - mc/h	2200	2900	3600	4300	5000	5700	6400	7100	
Net weight - kg.	29	35	42	49	56	62	69	76	
INCLUDED ACCESSORIES									
304 S/S BLIND PANEL 400X500H MM	2	6				2	2	2	
430 S/S LABYRINTH FILTER H=500 MM	4	2	6	8	10	10	12	14	

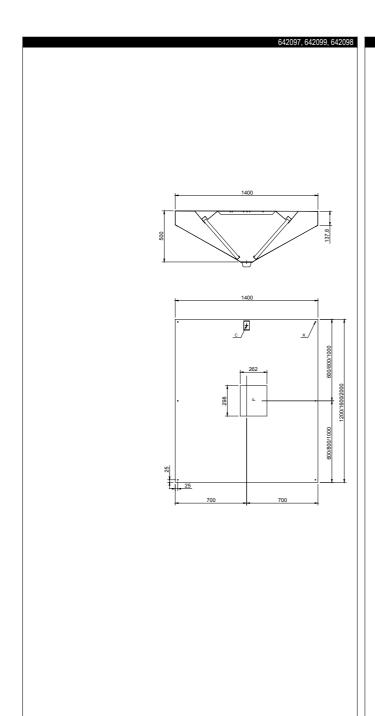

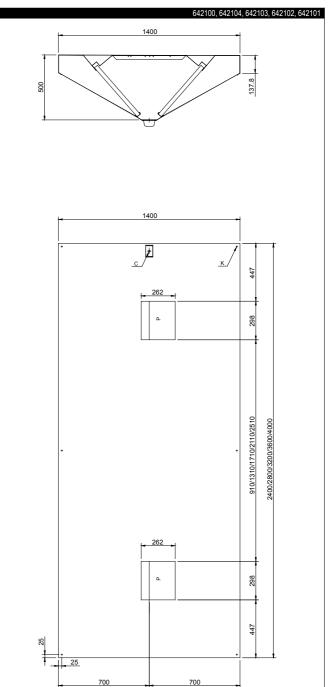

OPTIONAL ACCESSORIES										
ACCESSORIES	MODELS									
	MC1412BT 642097	MC1416BT 642098	MC1420BT 642099	MC1424BT 642100	MC1428BT 642101	MC1432BT 642102	MC1436BT 642103	MC1440BT 642104		
27-WATT LIGHTING FIXTURE W/1 LAMP-IP 65	680804		680804	680804			680804	680804		
36-WATT LIGHTING FIXTURE W/1 LAMP-IP 65		680805			680805	680805	680805	680805		
DRAIN FOR HOODS DIAM.1/2"(M) WITH PLUG	640409	640409	640409	640409	640409	640409	640409	640409		
FAN FOR VENTIL HOODS+DUCTED EXTRACT.UNIT	640748	640748	640748	640748	640748	640748	640748	640748		
SPEED VARIATOR FOR MOTORS UP TO 1.17 KW	640076	640076								
SPEED VARIATOR FOR MOTORS UP TO 1.7 KW			640686	640686	640686	640686	640686	640686		





www.zanussiprofessional.com